

Very High Pressure Refrigerant Recovery System

Model 503/13-H

for

R-503, R-13, R-23 & R-508B (SUVA-95)

The
Best
Solution
for
Recovery
of
Very
High
Pressure
Refrigerants



ARI Certified




Patent 5,722,247

Special Features:

- ▮ Portable (compact, lightweight)
- ▮ Microprocessor Controlled
- ▮ Fully Automatic (simple operation)
- ▮ Totally Self Contained
- ▮ Recovers into standard DOT-3AA Cylinder
- ▮ Can Recover to 25" Hg
- ▮ Operates on Standard 120 VAC
- ▮ Non-ambient Temperature Sensitive

FEATURES and BENEFITS of *The 503/13H*

1. Microprocessor Controlled
2. LCD Display
3. Fully Automatic
4. Portable
5. Totally Self Contained
6. Recovers directly into any size DOT-3AA Refrigerant Cylinder
7. Recovers R-13, R-23, R-503 & R-508B (*SUVA-95*) Refrigerants
8. Recovery Rate of 0.33 lb per minute for R-13 and 0.25 lb per minute for R-503
9. Can Recover to 25" Hg.
10. Non-Ambient Temperature Sensitive
11. Operates on 120 VAC

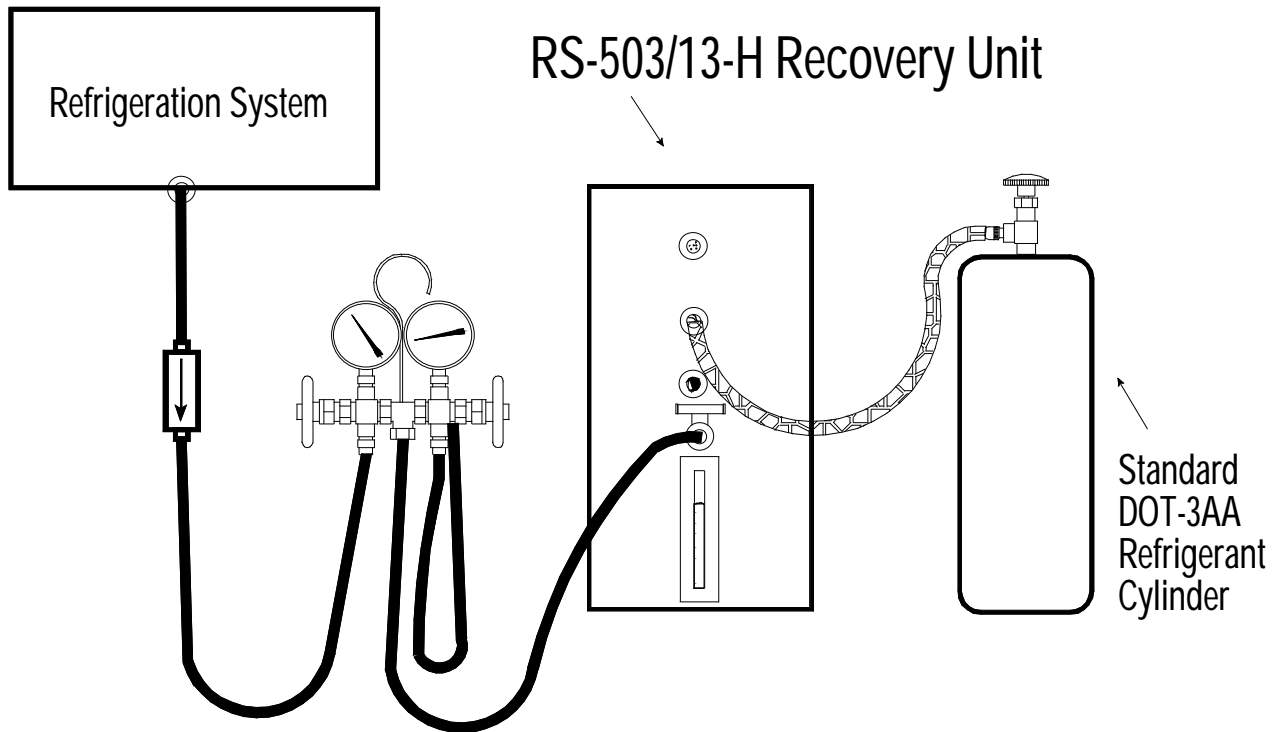

Typical Recovery System Hook-up

SPECIFICATIONS:

Electrical	Service 120 Volts AC Tolerance ± 10% Frequency 60 Hertz Current 15 AMPS
Dimensions & Weight	Height: 21" Width: 13" Depth 21" Net Weight 110 lbs (approximate)